

CLEAR
DESIGN

Boost
height adjustable desks




Work in
Motion.


Boost height-adjustable desks empower you to take control of your health and productivity through improved ergonomics and flexible options. These workstations are fast, smooth, and responsive, making the transition between sitting and standing effortless.

Statement of Line


Frames

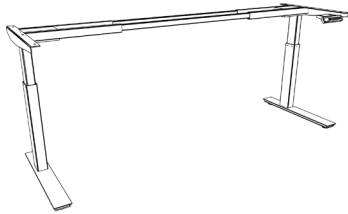

2-stage Legs

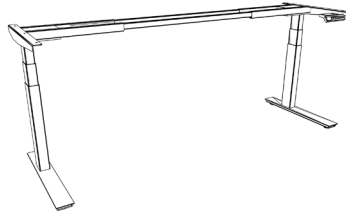


3-stage Legs

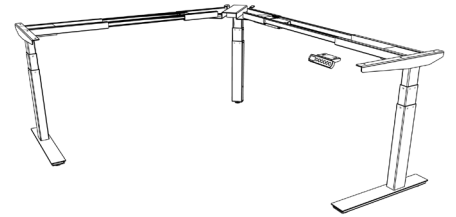

3 Leg, 3 stage


Options



Foot Extenders



Width Extender Bars

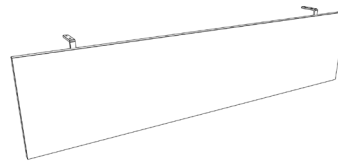

Modesty Panels



Worksurfaces

Features

- Dual motor, linear 2- or 3-stage height-adjustable frames
- 3-stage, 3-motor 90° and 120° workstations
- Digital handset with 3 programmable presets and USB port
- Whisper quiet dual motors with anti-collision technology
- Telescoping beam is width expandable up to 96" with stretcher bar
- C-Leg design offers more legroom (storage can slide over feet)
- Optional foot extenders to support multiple worksurface depths
- Matte metal finishes replace glossy for a more refined aesthetic—and cohesion across all our product lines
- Modesty panels available in laminate or steel



2- or 3-stage legs for choice of height range



Handset controllers with 3 memory presets and USB port




Foot Extenders available to support 24" and 30" deep worksurfaces

BOOST SPECIFICATIONS


Frame Type	Linear: 2- and 3-stage options 90° and 120°: 3-stage
Leg Style	C-Leg
Motors	Dual motor, with anti-collision technology
Frame Height Range	3-Stage: 21.6" – 47.7" (without Surface) 2-Stage: 26.3" – 46" (without Surface)
Frame Width Range	42.7" – 70.9 (extendtable to 96" with stretcher bar)
Frame Depth Range	24 – 30 inches
Active Power Consumption	Max 350 W
Standby Power Consumption	.2W
Power Cord	9 ft with standard NEMA 3-prong plug
Digital Handset	3 Programmable Presets
Adjustment Speed	3-Leg: 38mm/s 2-Leg: 33mm/s
Decibel Rating	<50 dB
Maximum Lifting Capacity	250 lbs
Certifications	ANSI/BIFMA/G1 X5.5, UL 962, SCS Gold
Frame Material	95+% Recycled Steel
Frame Paint	Low VOC Powder Coating
Frame Recyclability	100%
Steel Thickness	Frame: 16-Gauge Feet: 11-Gauge and 3-Gauge
Lead Time	FAST: 5 Business Days FX: 20 Business Days
Warranty	Lifetime (10 years on Worksurface)

WORKSURFACE SPECIFICATIONS


Surface Core	FAST: 1" Particle Board FX: 1.25" Particle Board
Surface Top Layer	FAST: Thermo-Fused Melamine FX: High-Pressure Laminate
Surface Underside Layer	FAST: Thermo-Fused Melamine FX: Phenolic Backer
Surface Edgeband	FAST: 3 mm PVC FX: 3 mm ABS
Surface Certification	FAST: FSC Mix, FSC Recycled, FSC Controlled Wood, TSCA Title VI & GREENGUARD FX: FSC Mix, FSC Controlled Wood, SCS Recycled Content & GREENGUARD Gold

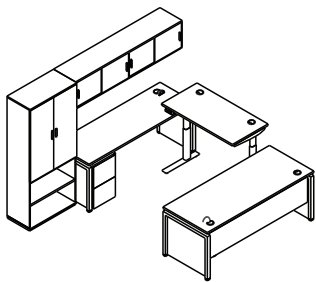

U-Shape Workstation
with Fixed-Height Surfaces

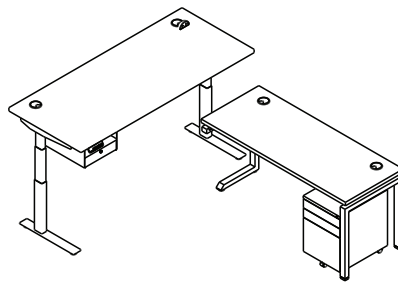

L-Shape Workstation
with Fixed-Height Return

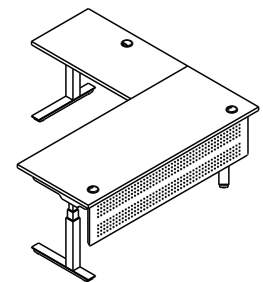

L-Shape Workstation
with Modesty Panel

Materials and Finishes

LAMINATE

FX PROGRAM: Additional laminate finishes are available on a 20-business-day lead time.



Shadow Elm



White Oak



Sahara Ridge




Electric White

STEEL

Black



Silver



White



Keep work moving
with Boost.