

BOOST PRO

SIDE-BY-SIDE WORKSTATION

Includes Add-Ons: **A1**

General Installation Guide



[Watch Entire
Install Video](#)


EDITION CODE

BP-1 :: Power Setup 1

BP-1 :: Side-by-Side Workstation..... 13

ADD-ONS

A1 :: Return Surface..... 25

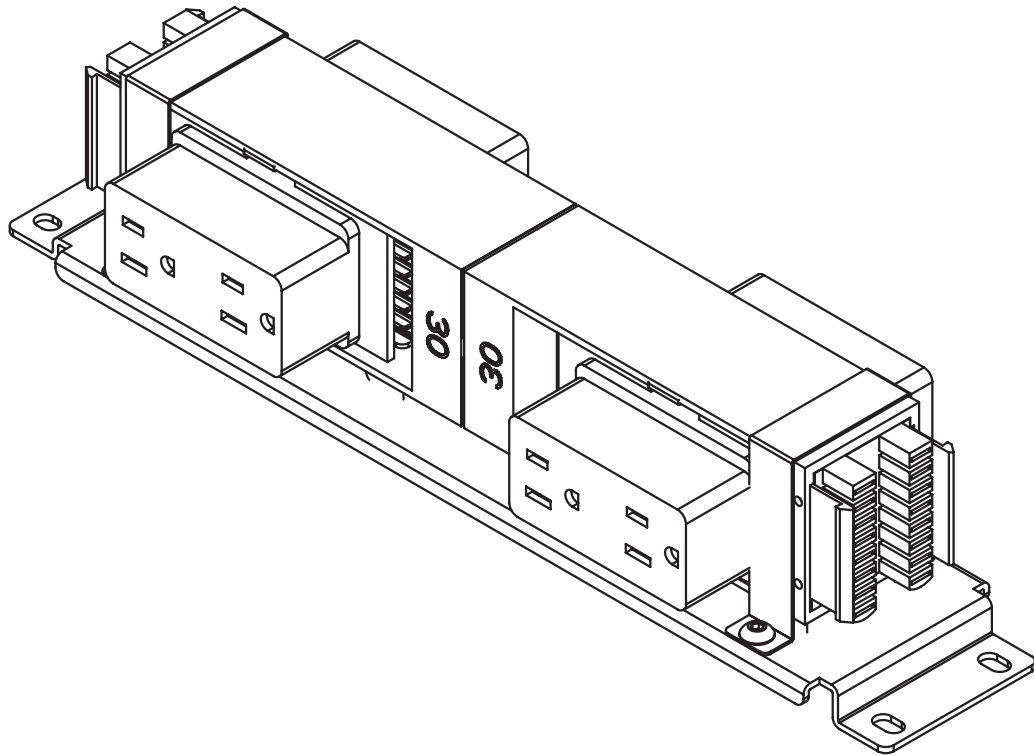

POWER FOR 48" WORKSTATION

OVERVIEW










BOOST Pro Workstation

⚠ Quantities are for a single facing workstation.
Parts may vary depending on project, but install
steps will remain the same.



[Scan to
Watch Section](#)

PARTS LIST


BOX CODE	QTY	DESCRIPTION	
BPROTPB	1	Module Mounting Plate (Short)	
	2	Power Module Bracket	
	1	Power Beam	
	4	Machine Screw	
	4	Machine Screw	
	1	Power Beam Plate	
PRODB	1	Double Power Block	
PROR	4	Duplex Receptacle	
PROJ	1	Jumper	

1 | ATTACH DUPLEX RECEPTACLES TO DOUBLE POWER BLOCK



Scan to
Watch Step

With duplex receptacle tab on top, slide receptacle towards outside of double power block securing within block section. Duplex receptacle tab will snap and lock into place. Repeat for all sides.

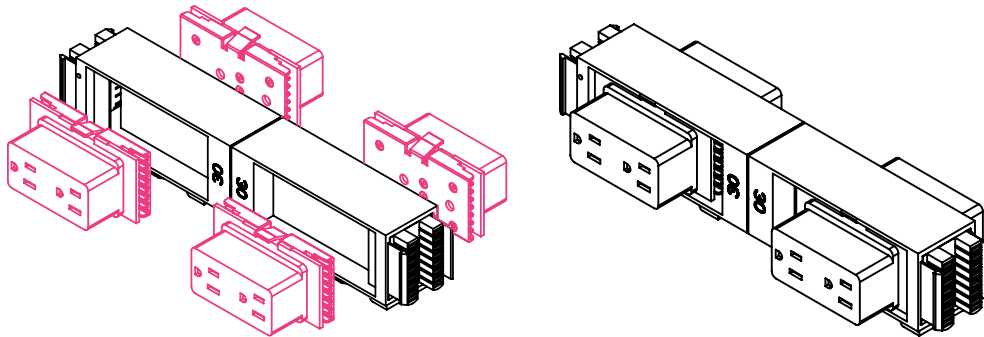


2 | ATTACH POWER ASSEMBLY TO MODULE MOUNTING PLATE



Scan to
Watch Step

Place power module on top of module-mounting plate. Slide first power module bracket over power module. Secure with 2 screws. Repeat for other bracket.

Note: Do not over torque screws.

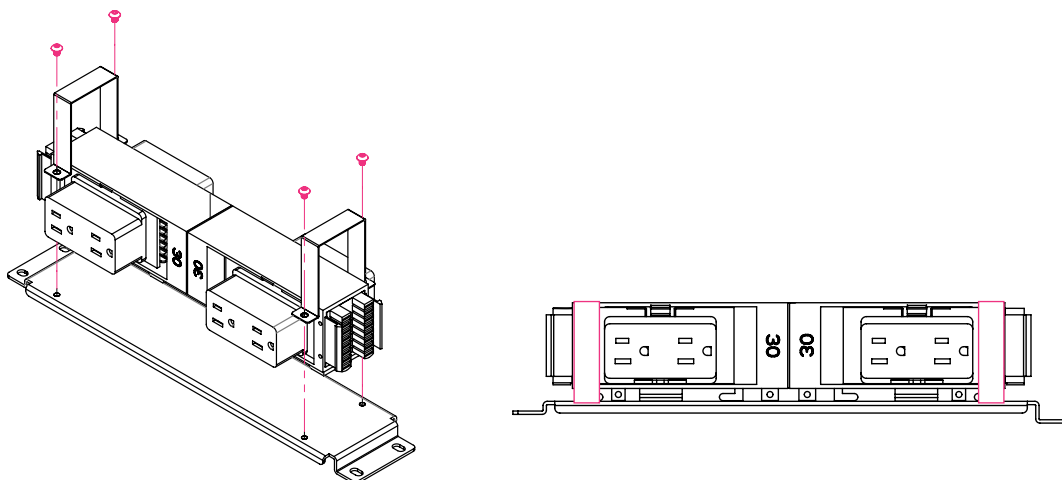


3 | CONNECT JUMPER TO POWER ASSEMBLY

Determine where the bigger jog is located on mounting plate and connect thicker end of jumper to any one of the double power block prongs.



Scan to
Watch Step

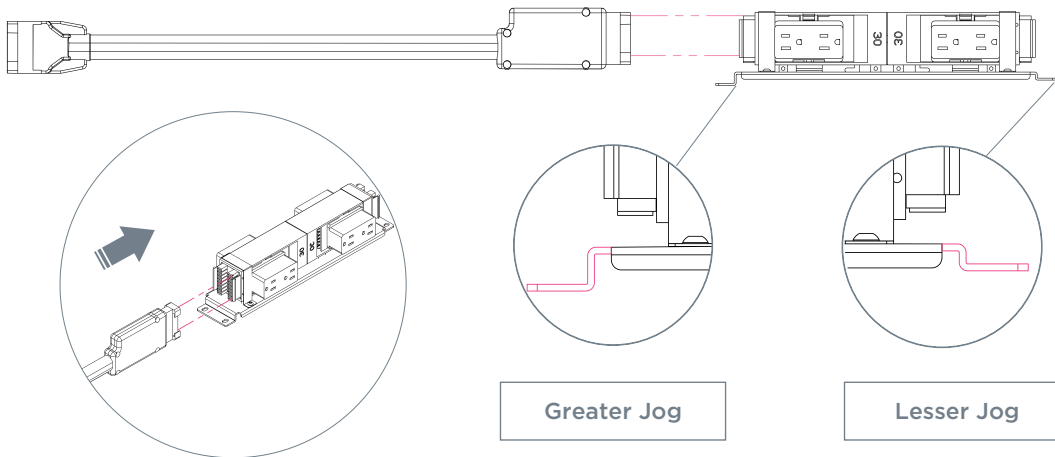


4 | ASSEMBLE POWER BEAM

Remove both magnetic strips and place to side. Slide inner beam inside of outer beam and adjust accordingly.



Scan to
Watch Step

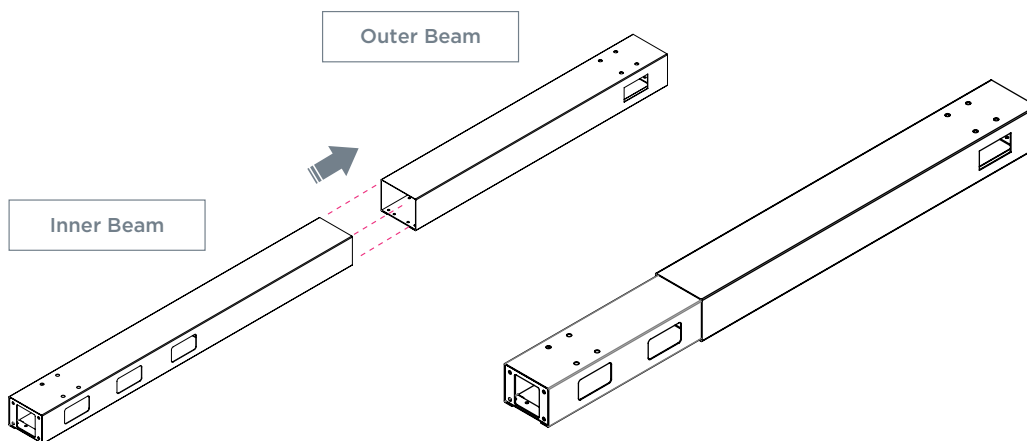


5 | INSERT ASSEMBLED POWER INTO POWER BEAM

Insert and guide jumper through opposite end of beam. Pull jumper out from other side. Connect mounting plate to power beam using 4 screws. Place both magnetic strips back on power beam.



Scan to
Watch Step

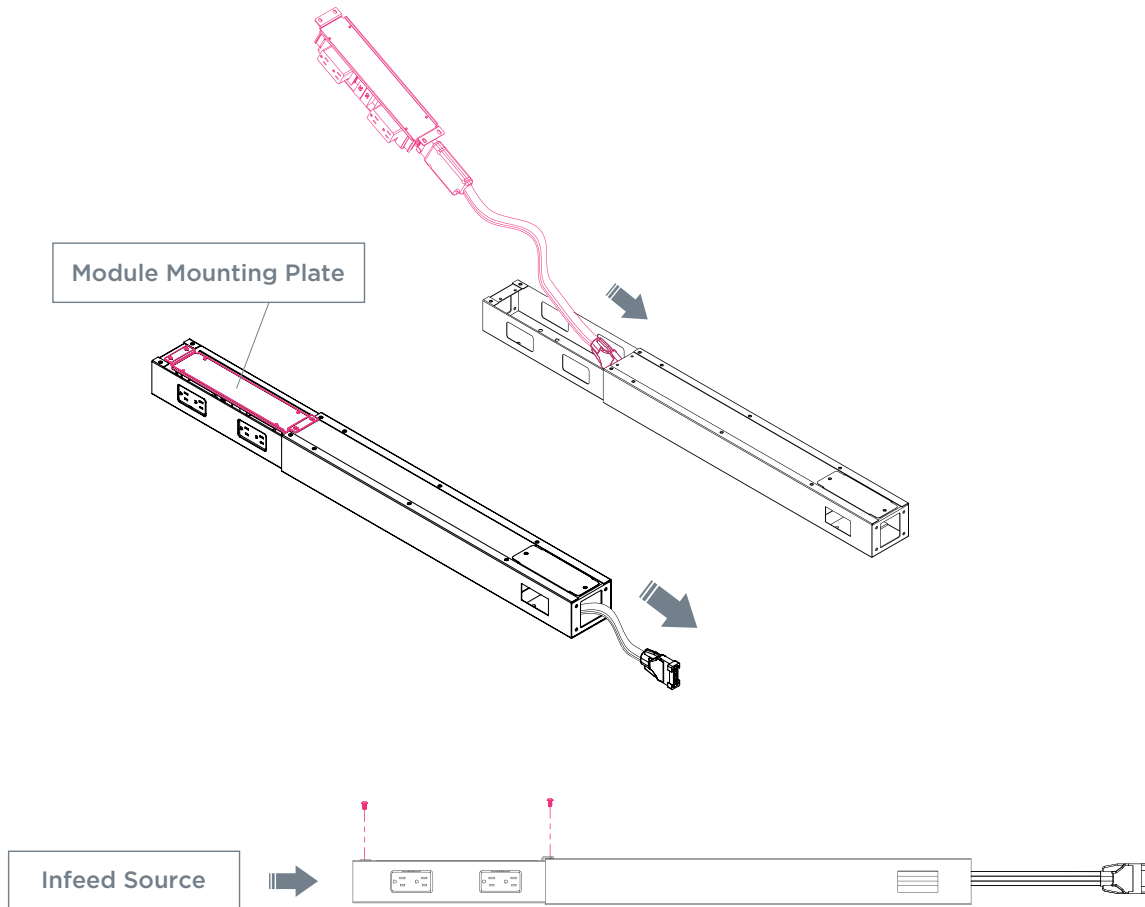



OPTIONAL | POWER BEAM PLATE

Only install if data is not being used. Disregard otherwise.



[Scan to
Watch Step](#)

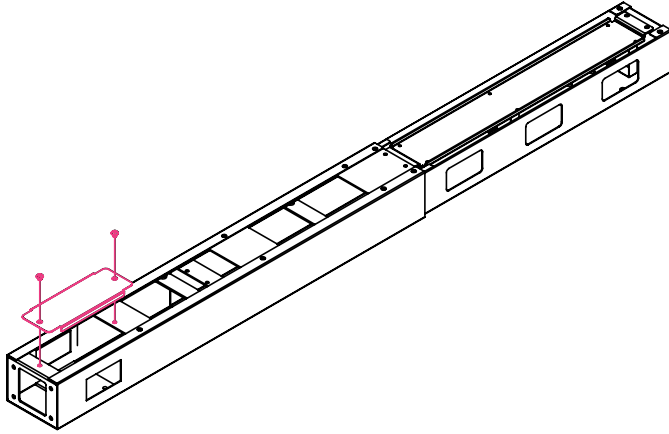

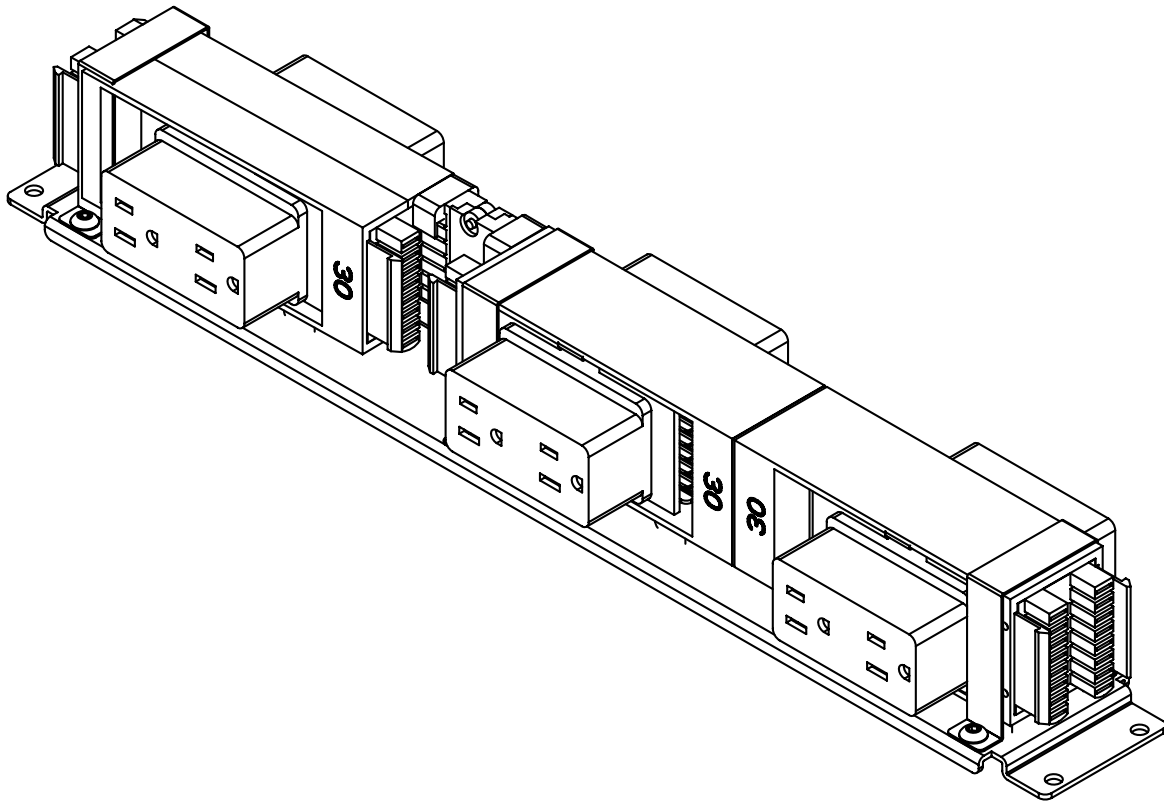

POWER FOR 54"-72" WORKSTATIONS

OVERVIEW












BOOST Pro Workstation

⚠ Quantities are for a single facing workstation.
Parts may vary depending on project, but install
steps will remain the same.



Scan to
Watch Section

PARTS LIST


BOX CODE	QTY	DESCRIPTION	
BPROTPB	1	Module Mounting Plate (Long)	
	3	Power Module Bracket	
	1	Power Beam	
	4	Machine Screw	
	6	Machine Screw	
	1	Power Beam Plate	
PRODB	1	Double Power Block	
PROSB	1	Single Power Block	
PROBC	1	In-Line Power Block Connector	
PROR	6	Duplex Receptacle	
PROJ	1	Jumper	

1 | ATTACH DUPLEX RECEPTACLES TO POWER BLOCKS



Scan to
Watch Step

With duplex receptacle tab on top, slide receptacle towards outside of power block securing within block section. Duplex receptacle tab will snap and lock into place. Repeat for all sides and blocks.

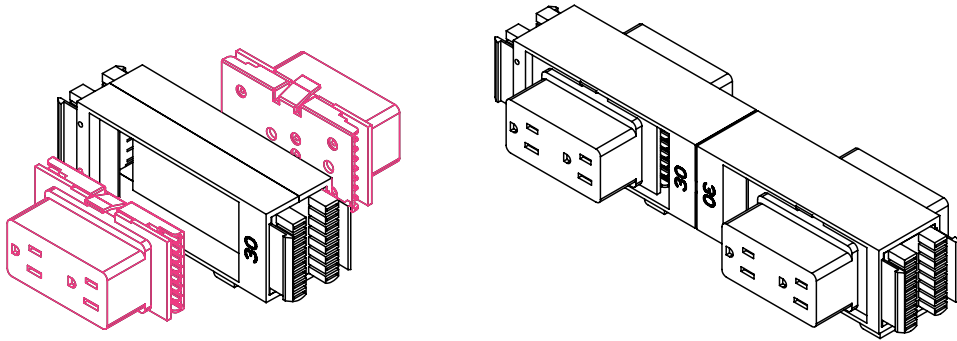


2 | ATTACH DOUBLE POWER BLOCK TO SINGLE POWER BLOCK



Scan to
Watch Step

Using the in-line power block connector, attach double power block to single power block.

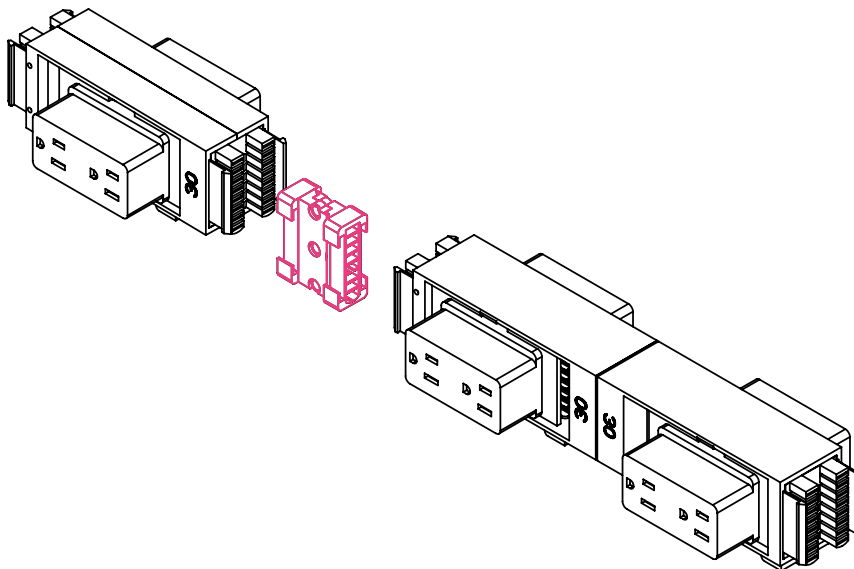


3 | ATTACH POWER ASSEMBLY TO MODULE MOUNTING PLATE



Scan to
Watch Step

Place power module on top of mounting plate. Slide first power module bracket over power module. Secure with 2 screws. Repeat for other brackets.

Note: Do not over torque screws.

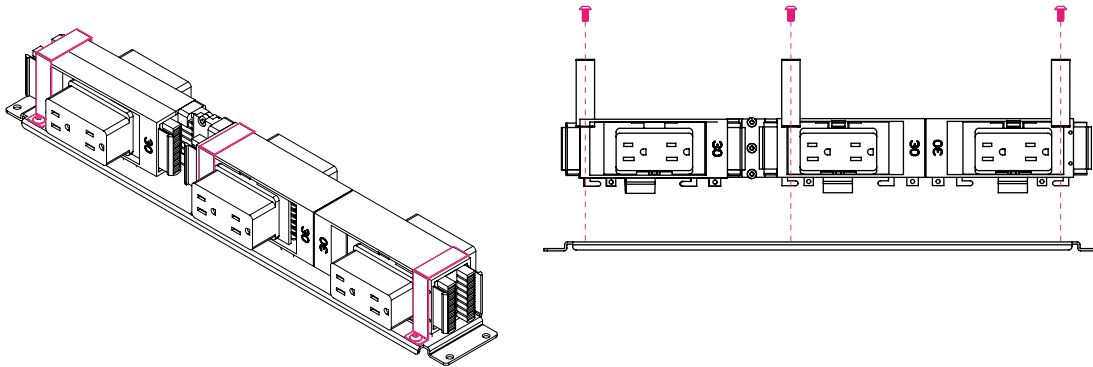


4 | CONNECT JUMPER TO POWER ASSEMBLY



Scan to
Watch Step

Connect thicker end of jumper to any one of the single power block prongs.

Note: Only connect jumper to single block.

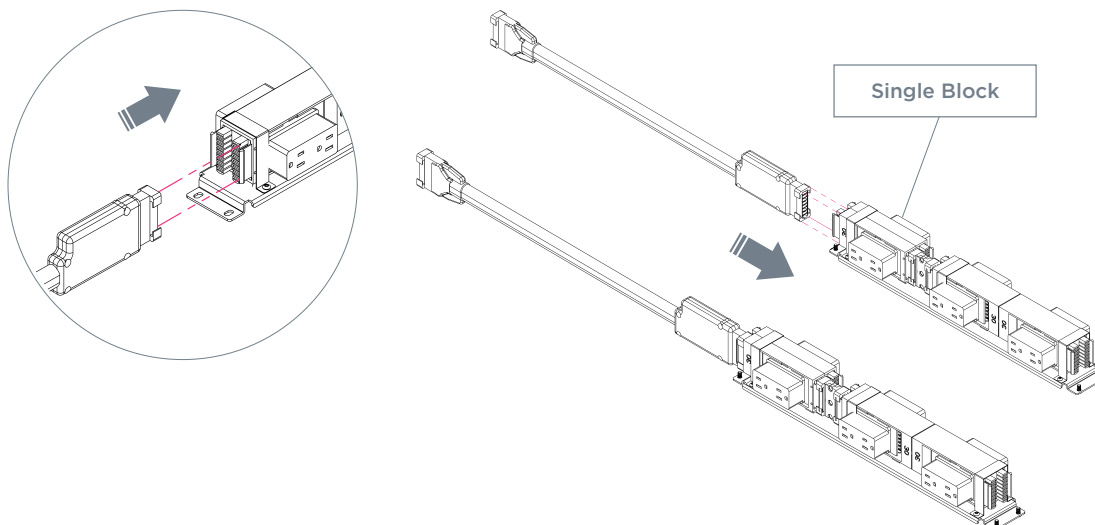


5 | ASSEMBLE POWER BEAM

Remove both magnetic strips and place to side. Slide inner beam inside of outer beam and adjust accordingly.



Scan to
Watch Step

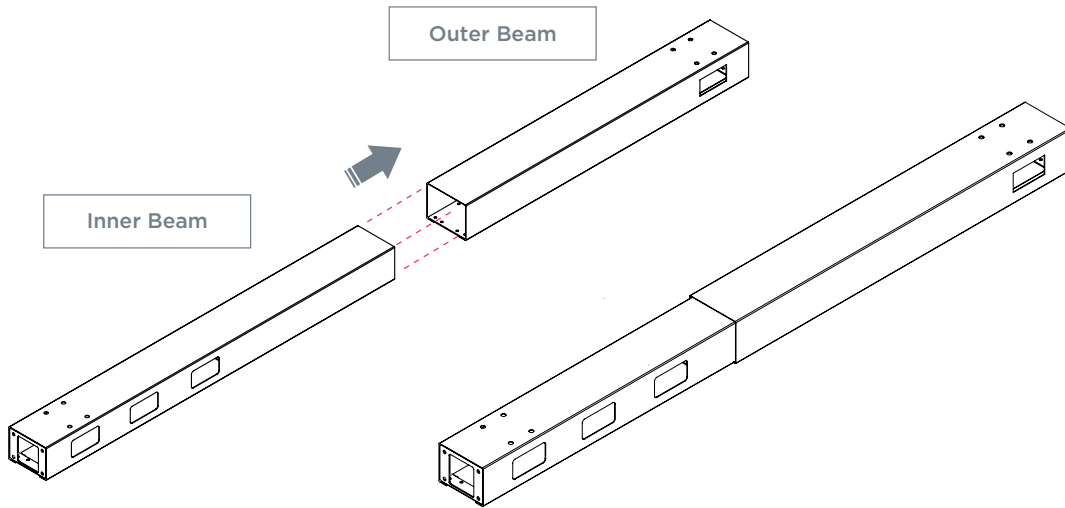


6 | INSERT ASSEMBLED POWER INTO POWER BEAM

Insert and guide jumper through opposite end of beam. Pull jumper out from other side. Connect mounting plate to power beam using 4 screws. Place both magnetic strips back on power beam.



[Scan to Watch Step](#)

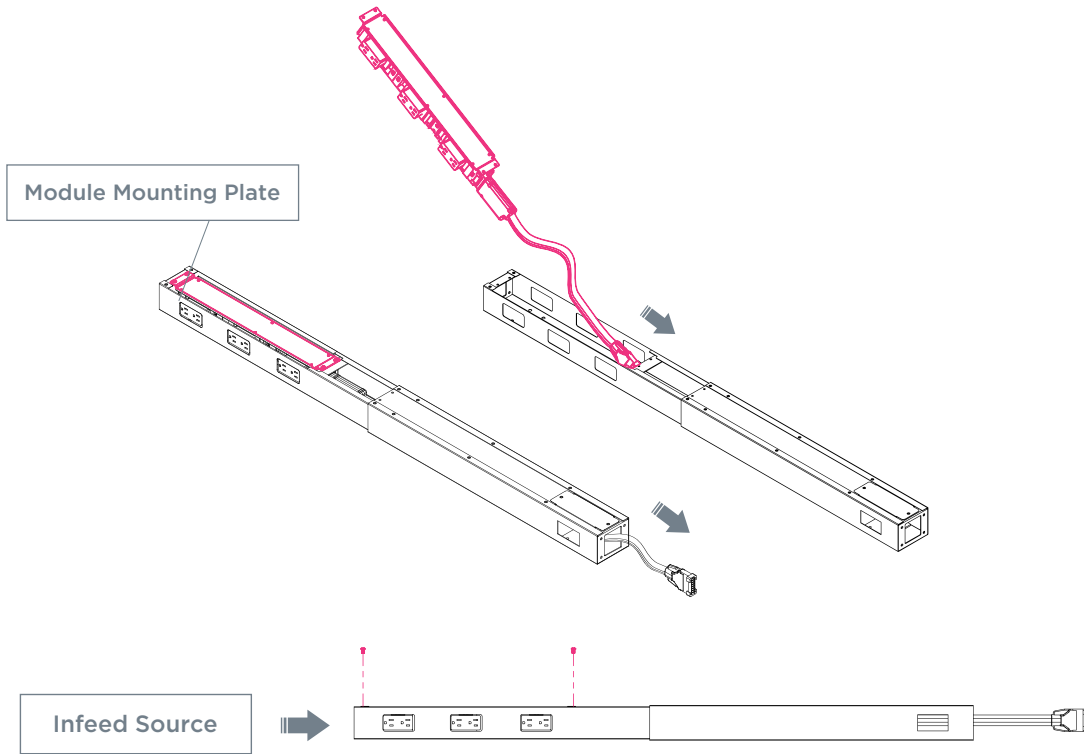



OPTIONAL | POWER BEAM PLATE

Only install if data is not being used. Disregard otherwise.



[Scan to Watch Step](#)

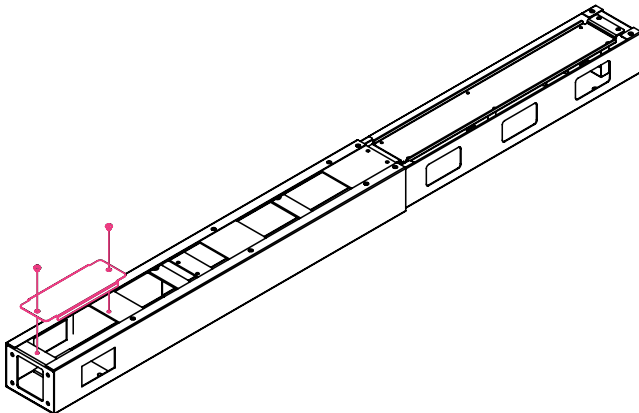

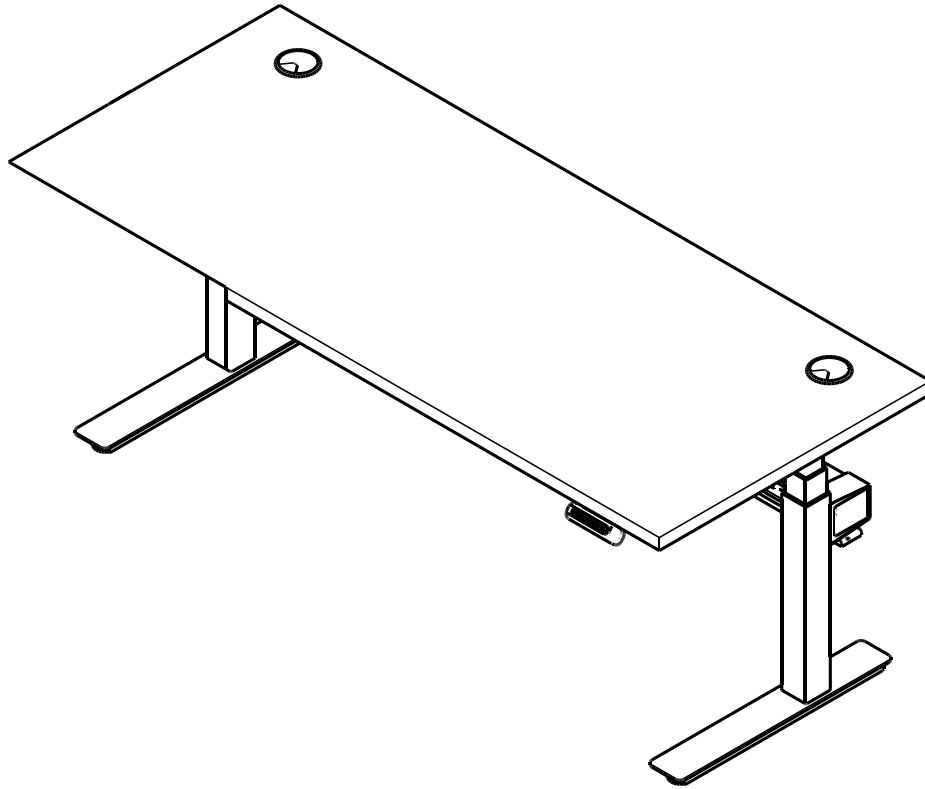

SIDE-BY-SIDE OVERVIEW















BOOST Pro Workstation

 Quantities are for a single workstation.
Parts may vary depending on project, but install
steps will remain the same.



[Scan to
Watch Section](#)

PARTS LIST

BOX CODE	QTY	DESCRIPTION	
BPROF	2	Adjustable Leg	
	2	Surface Attachment Bracket	
	2	Surface Support Bracket	
	1	Adjustable Surface Bracket (with Control Box)	
BPRO24F	1	24" C-Foot (Set of 2)	
BPROSRB	1	SR Beam Mounting Bracket (Set of 2)	
BPROBRG	1	Power Beam Bridge	
BPROTPB	1	Data Beam Bridge	
	1	Power Beam (Assembled)	
	1	Data Beam Set	
	6	Power-Opening Rubber Gasket	
	2	Power & Data Plastic Cover	
BD4PFP	2	Data Faceplate (4 Ports)	
GBXXXX	1	Laminate Surfaces	


1 | CONNECT LEGS AND SUPPORT BRACKETS TO ADJUSTABLE SURFACE BRACKET



Scan to
Watch Step

Slide one support bracket underneath each end of adjustable surface bracket. Set one leg at each end. Be sure all pre-drilled holes are aligned and secure with machine screws.

Note: Longer side of support brackets will be facing front of workstation and welded brackets from legs will be facing back of workstation.

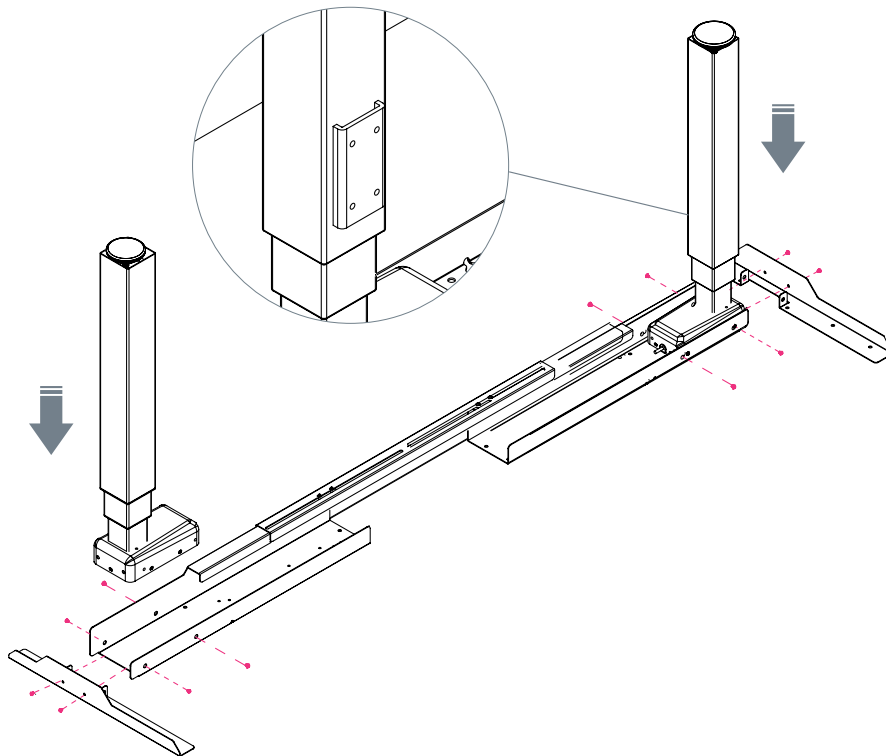


2 | SET FRAME ON SURFACE AND SET LENGTH


Align frame with surface width and measure from outer edges of workstation legs to determine proper workstation length. Use chart below for proper frame length.




Scan to
Watch Step

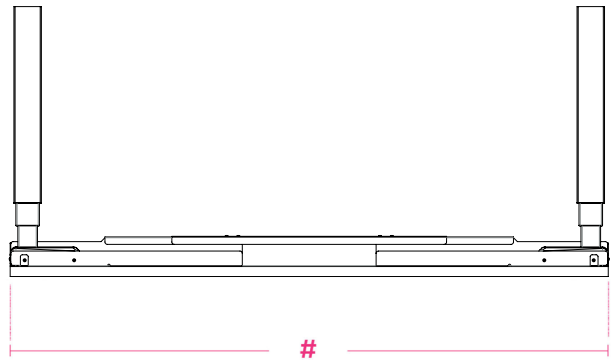

SURFACE WIDTH	FRAME LENGTH (#)
48"	47.5"
54"	54"
60"	60"
66"	66"
72"	66"

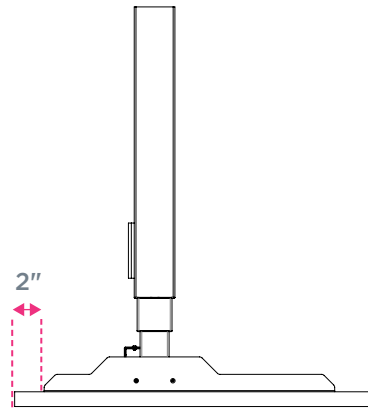

24" Deep Surfaces

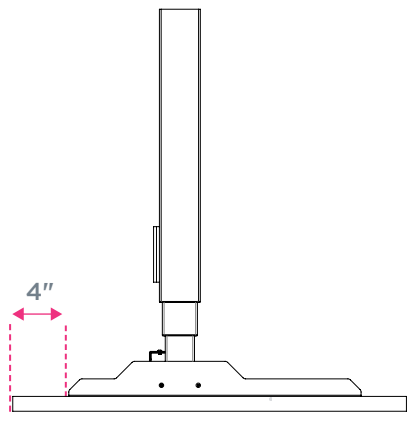


30" Deep Surfaces

3 | TIGHTEN SCREWS ON ADJUSTABLE SURFACE BRACKET

Tighten adjustable surface brackets screws to secure length.



Scan to
Watch Step

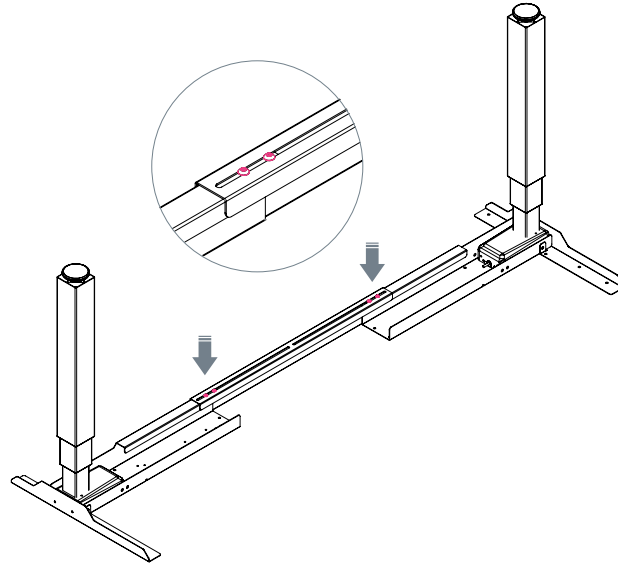


4 | RUN HANDSET THROUGH FRAME NOTCH AND SECURE FRAME TO SURFACE

Run handset through frame notch and set aside. Using wood screws provided, secure surface to frame.



Scan to
Watch Step

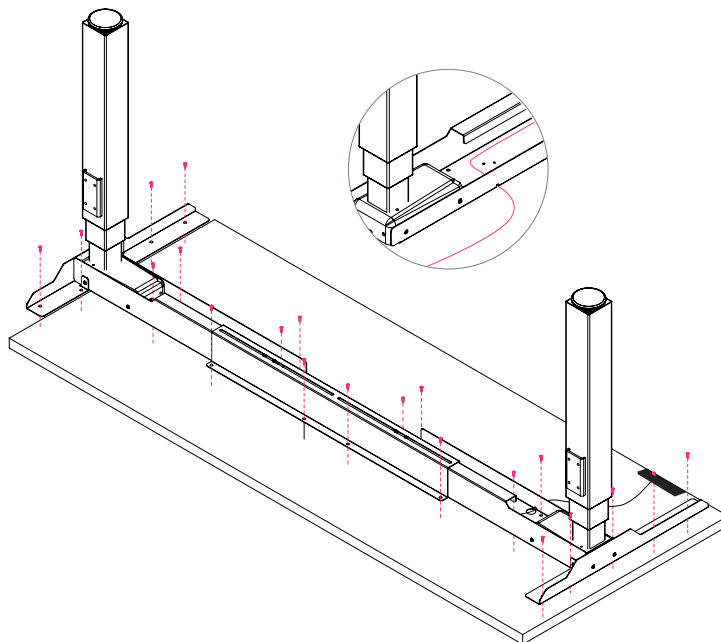


5 | ATTACH POWER BEAM MOUNT

Slide beam mount over the welded bracket on back of leg and secure with 4 screws. Smaller cutout on mount will be facing inward.

Note: Use a right angle drill to simplify the process.



[Scan to
Watch Step](#)

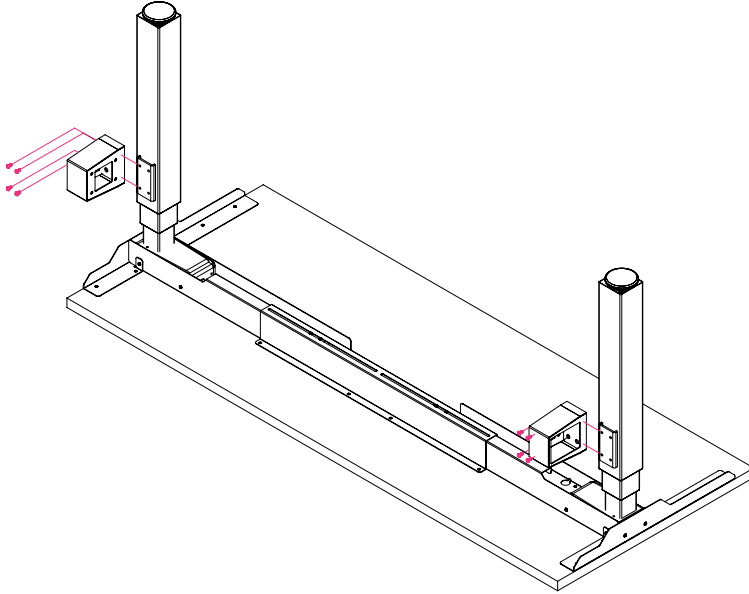


6 | SECURE POWER BEAM TO WORKSTATION

Use drill extension to secure power beam end to center cutout of beam mounting bracket with 4 screws on each end.




[Scan to
Watch Step](#)

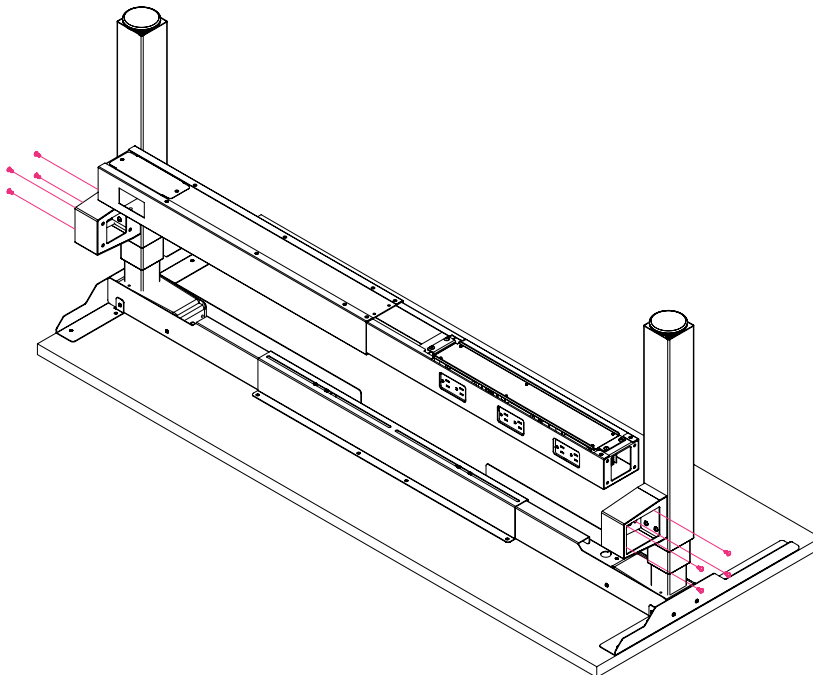

7 | SET POWER BEAM WIDTH

Once length of workstation is determined, insert and secure set screws to underside of beam and tighten to secure.


Note: Use 2 set screws with 48" workstations and 4 set screws for all other widths.

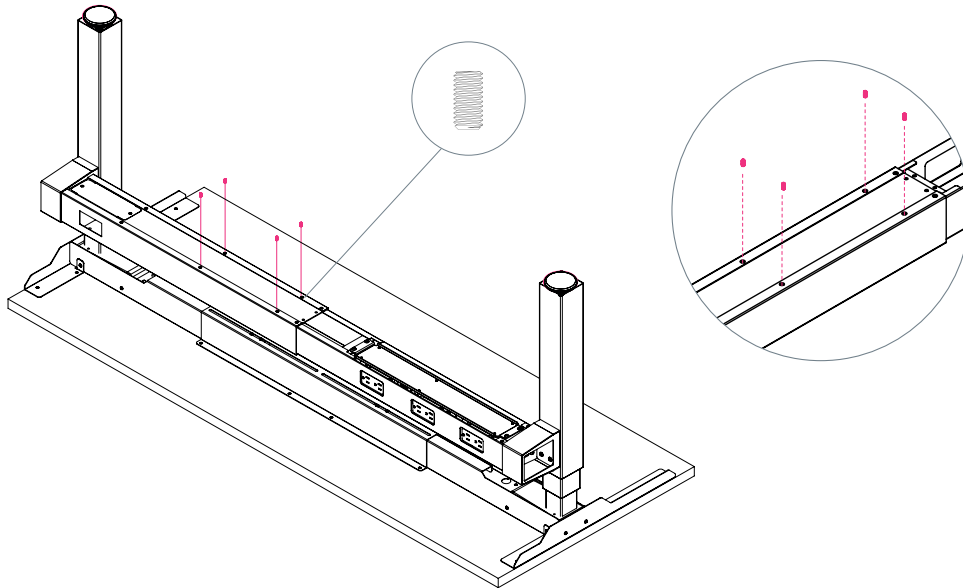

Scan to
Watch Step

8 | ASSEMBLE DATA TRAY

Position data tray underneath power beam and extend width until pre-drilled holes align. Secure using 6 screws.

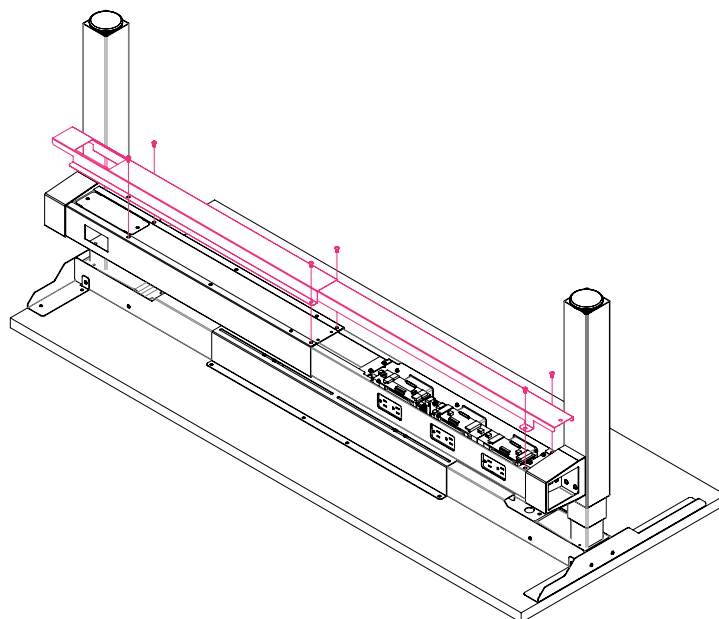

Scan to
Watch Step


OPTIONAL | SLIDE ON PANEL BRACKETS

If installing panels for workstation, slide panel brackets down each leg into position where panel will be installed.

Note: Wooden panels will be installed at the end of workstation install.



Scan to
Watch Step

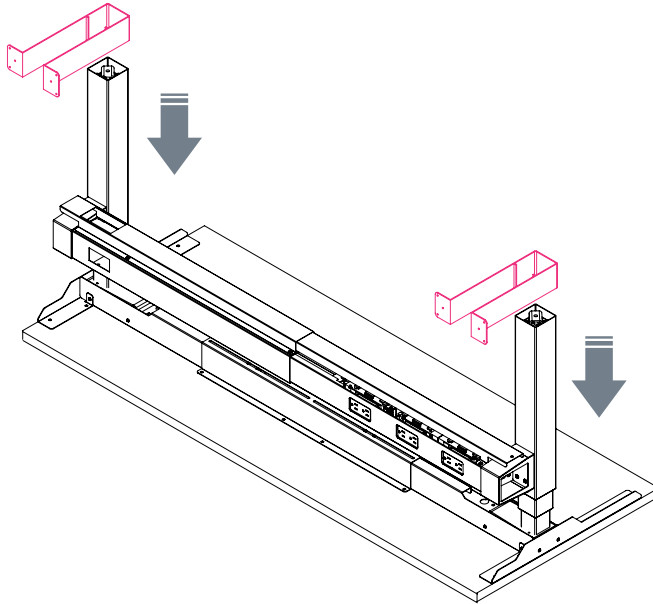


9 | REMOVE GLIDES AND INNER BRACKETS

Twist off leg glide. Then, using an Allen wrench remove screws that are holding the inner bracket and remove bracket from leg. Connect feet using 4 bolts for each foot.

Note: Glide and inner bracket must be removed so foot can be added to workstation.



Scan to
Watch Step

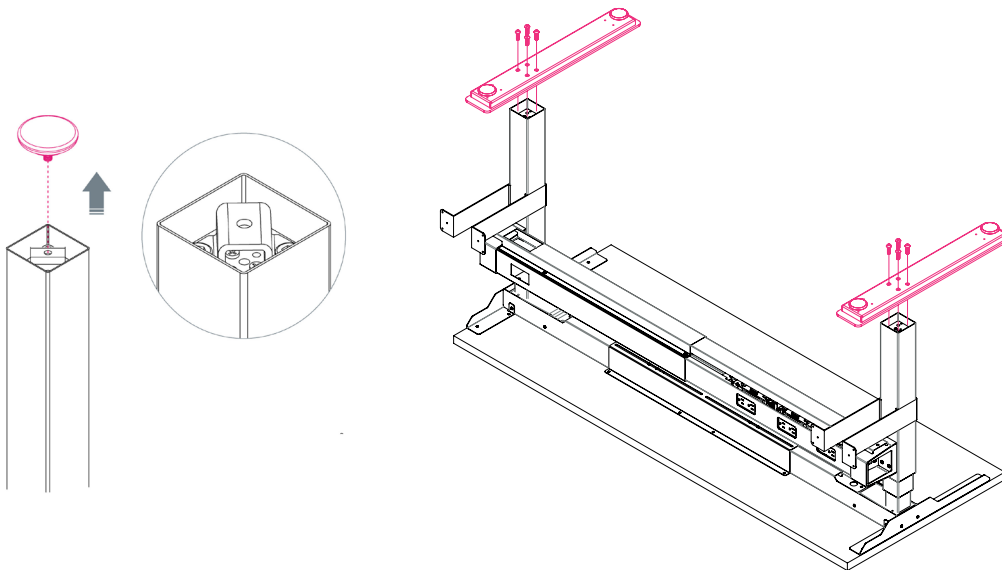


10 | CONNECT LEG CABLES AND HANDSET CABLE TO CONTROL BOX



Scan to
Watch Step



Note: If adding a height-adjustable return surface, **DO NOT** connect cables to control box during this step. A return surface control box will be installed, replacing existing control box.

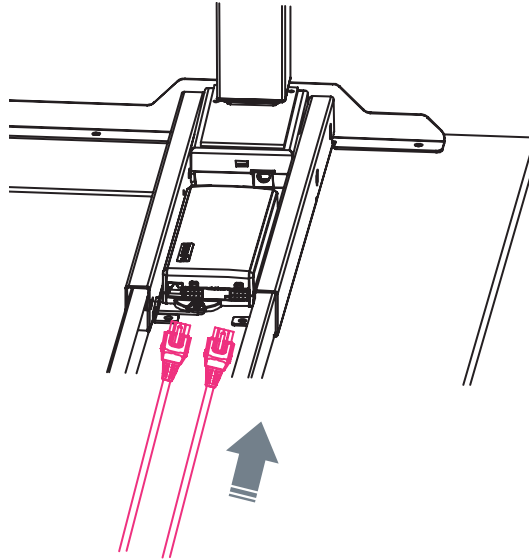


11 | SECURE HANDSET



Scan to
Watch Step

Align front of handset with surface edge and secure with wood screws.


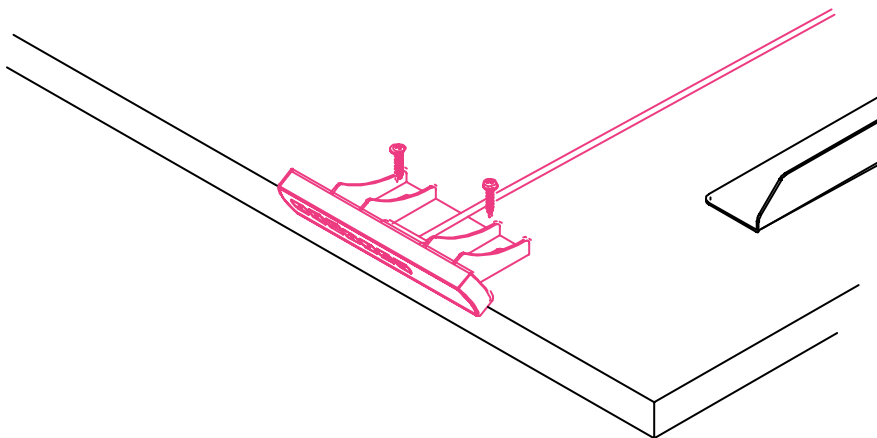


12 | FLIP WORKSTATION AND INITIALIZE HANDSET

With a partner, flip workstation right side up and connect power cord.
Press and hold ▲ and ▼ simultaneously for 5 seconds until both leg columns are in lowest position (Desk will slightly rise, lower again, and then beep).
Release buttons. The system is now operational.



[Scan to
Watch Step](#)

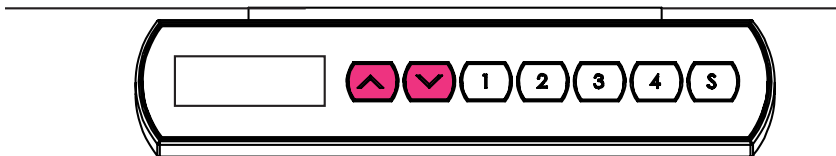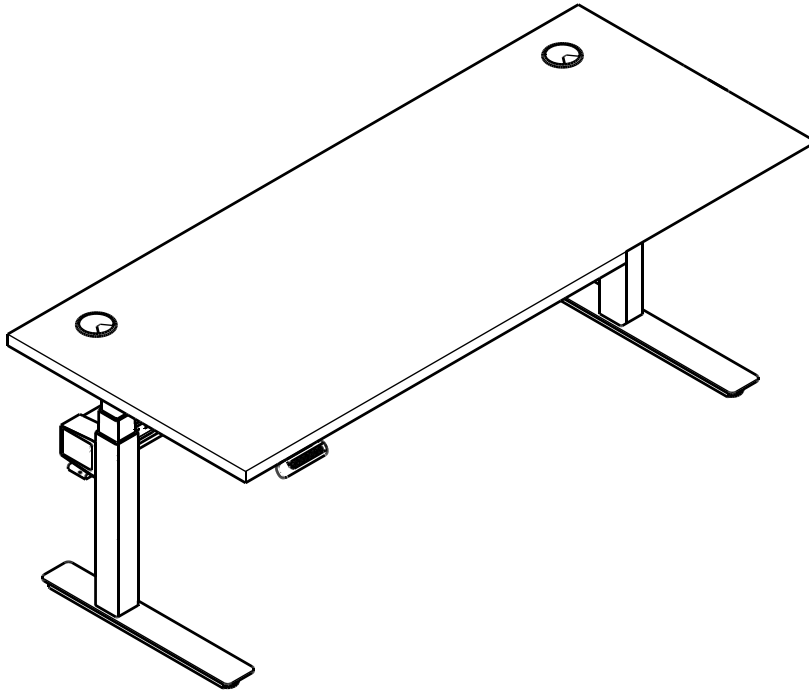


13 | ALIGN AND CONNECT WORKSTATIONS



Scan to
Watch Step

Slide data beam bridge inside data beam. Align second workstation and push workstations closer together. Connect jumper. Remove magnetic strips from power beam bridge and set bridge over jumper. Attach magnetic strips back to bridge. Push workstations together. Both ends of bridges should sit inside the power beam and data beam.


Note: For 72" workstations, use BPROBRG2 (12.25"). For 48"-66" workstations, use BPROBRG1 (7.5").

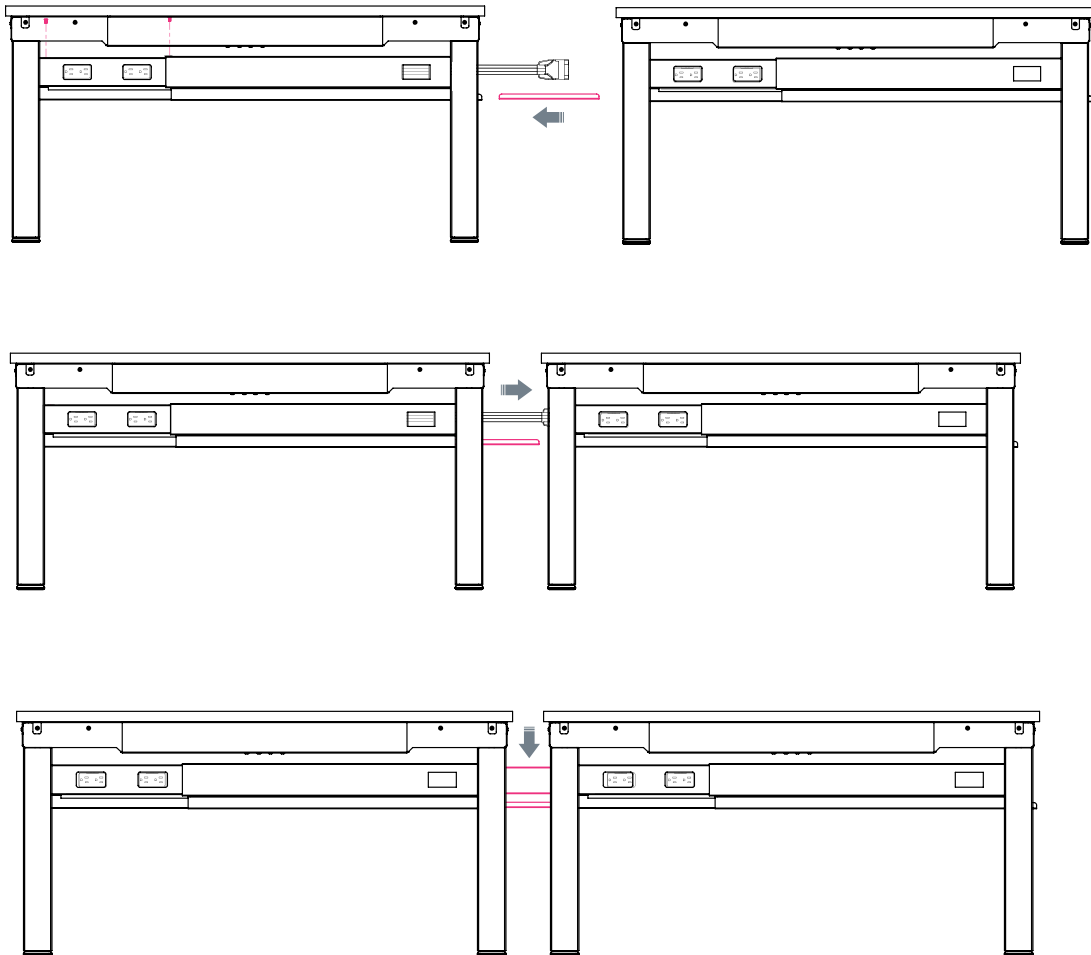

14 | INSTALL RUBBER GASKETS AND PLASTIC COVERS




Scan to
Watch Step

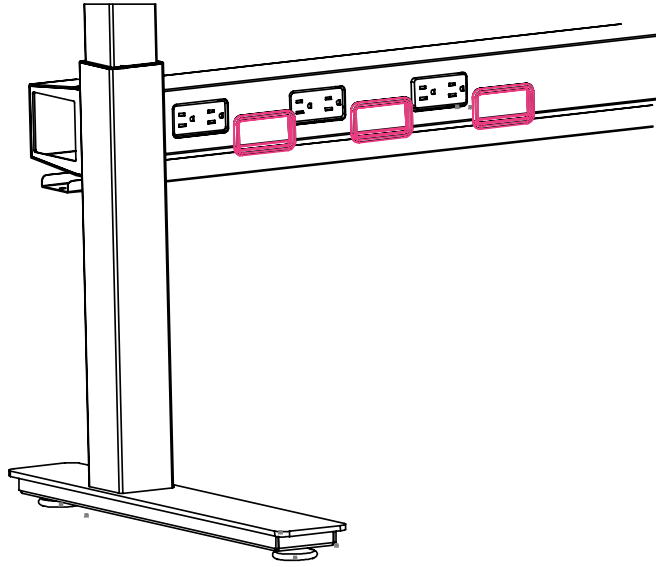


OPTIONAL | INSTALL SUPPORT BAR FOR 72" SURFACES



Scan to
Watch Step

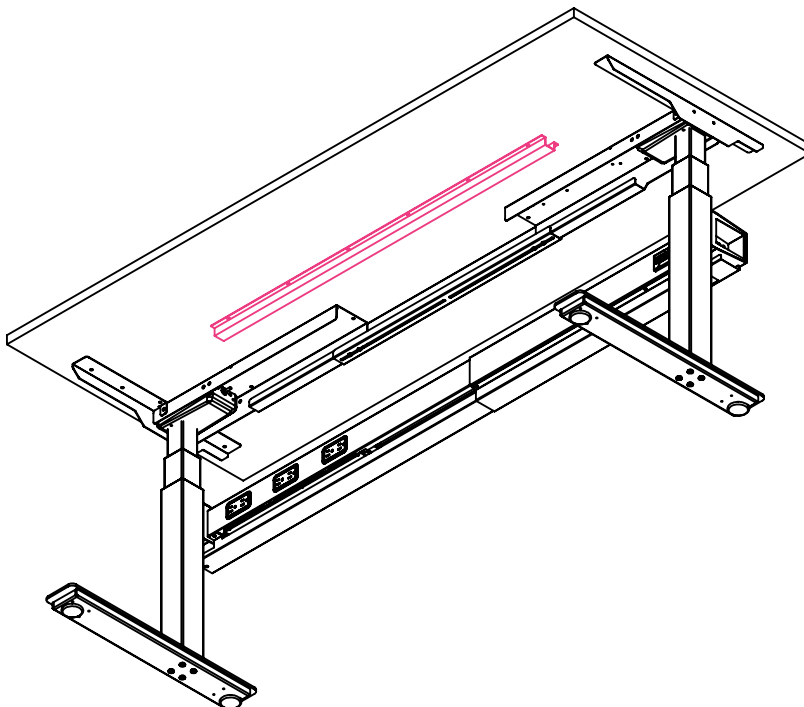

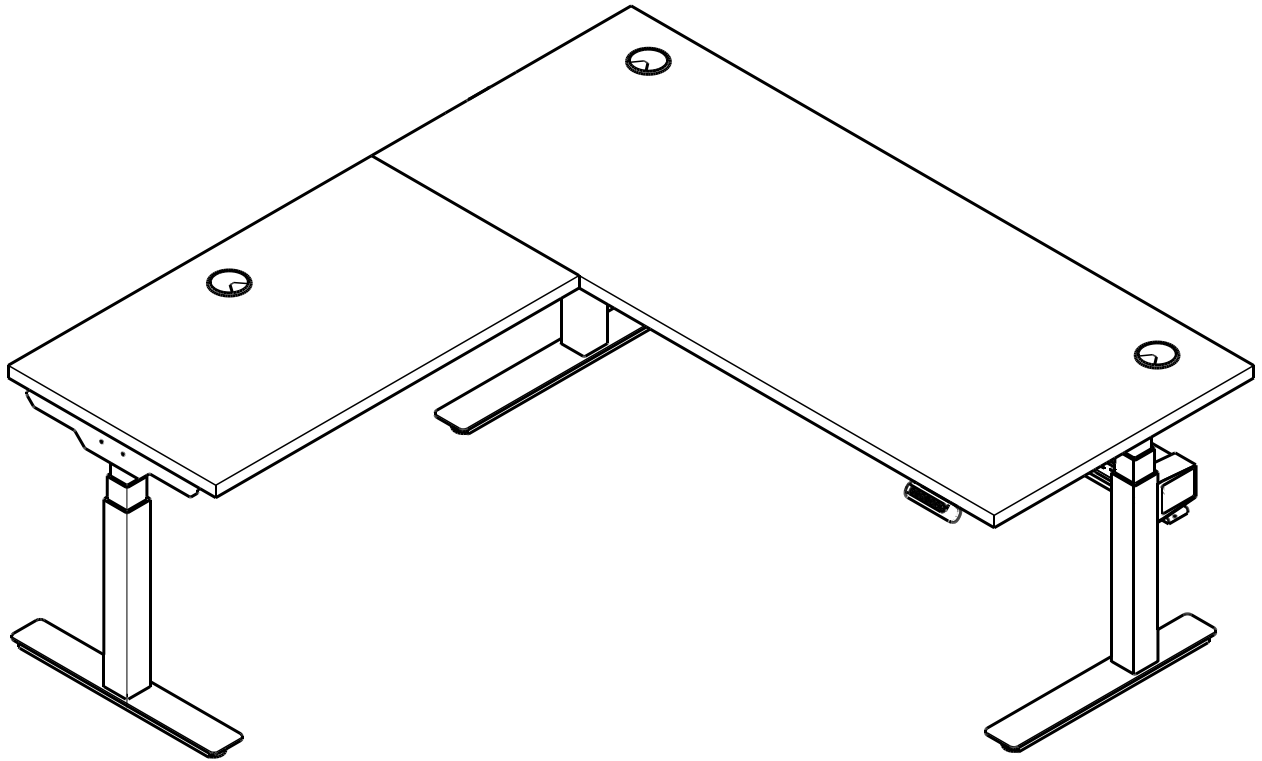

RETURN SURFACE OVERVIEW










BOOST Pro Workstation

 Quantities are for a single workstation.
Parts may vary depending on project, but install
steps will remain the same.



[Scan to
Watch Section](#)

PARTS LIST


BOX CODE	QTY	DESCRIPTION	
BPROLF	1	Adjustable Return Leg	
	1	T-Foot	
	1	Return Leg Support Bracket	
	1	Control Box (for L-Shape)	
	1	Extension Cable	
	1	Cable	
	1	Flat Bracket	
GBXXXX	1	Return Surface	
BFB1	2	Flat Bracket	

1 | CONNECT RETURN LEG TO SUPPORT BRACKET

Secure return leg support bracket to return leg from using 6 screws.



[Scan to
Watch Step](#)

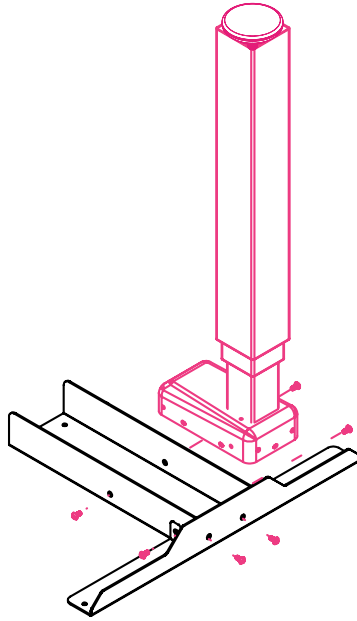


2 | REMOVE GLIDE AND INNER BRACKET

Twist off leg glide. Using an Allen wrench remove screws that are holding the inner bracket and remove bracket from leg.



[Scan to
Watch Step](#)

Note: Glide and inner bracket must be removed so foot can be added to workstation.

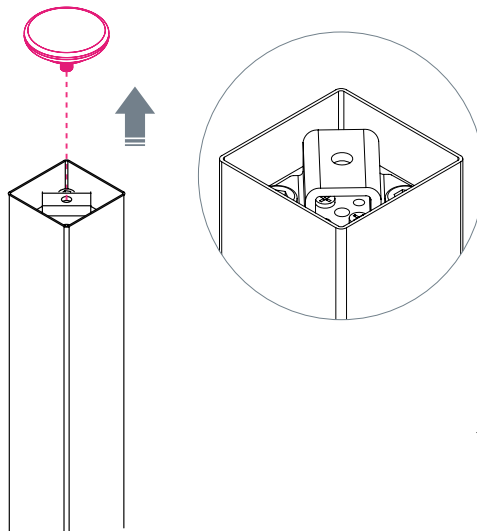


3 | CONNECT T-FOOT TO RETURN LEG

Secure T-foot to return leg using 4 bolts.



Scan to
Watch Step

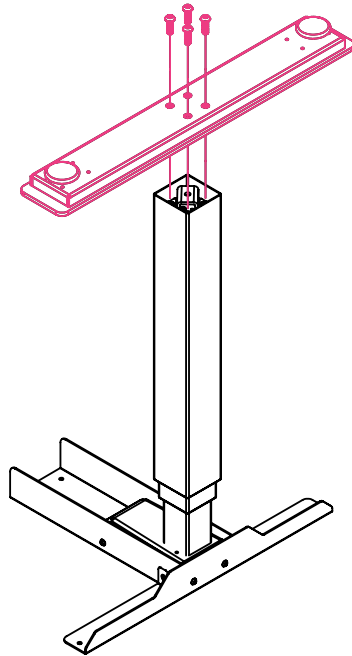


4 | ATTACH RETURN LEG TO RETURN SURFACE

Requires 6 wood screws.

Note: The return leg will be centered along the depth of the return surface.



Scan to
Watch Step

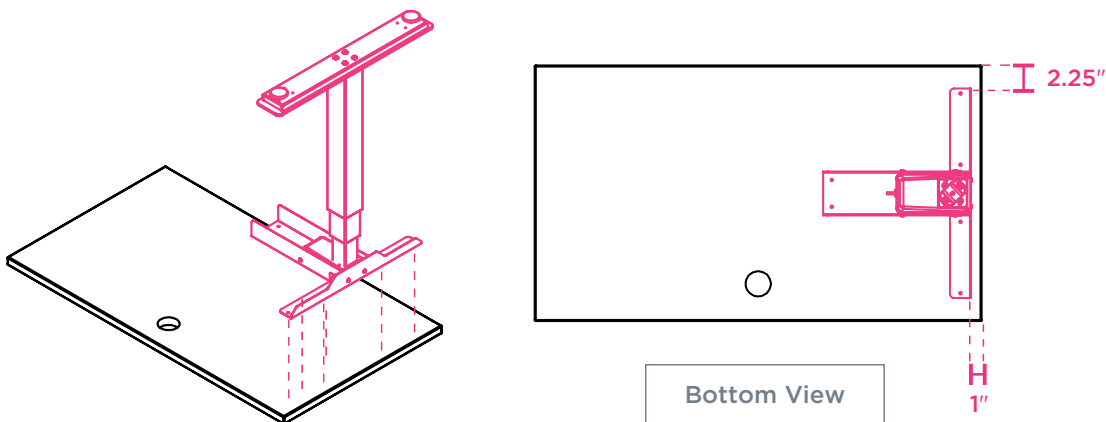


5 | ATTACH FLAT BRACKETS TO MAIN SURFACE

Attach 2 small flat brackets and 1 large flat bracket under the main surface edge using 6 wood screws. Center-align brackets on the edge of main surface so that only half of the brackets are being secured to main surface.

Note: Leave space between large bracket and inner small bracket to install support bar.



[Scan to
Watch Step](#)

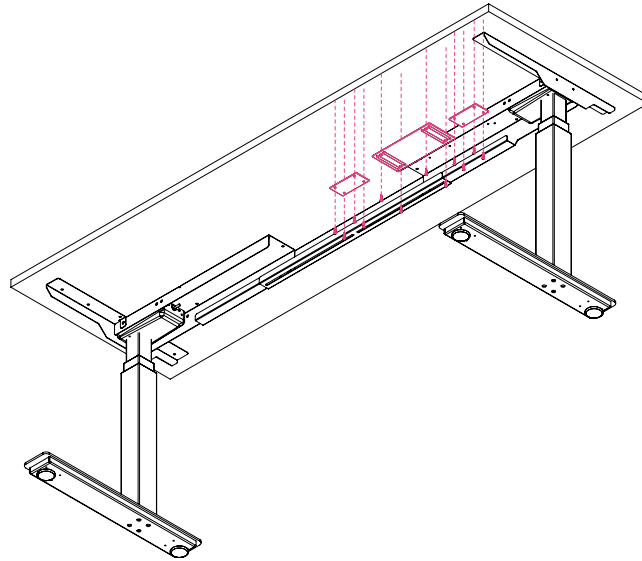


6 | SECURE RETURN TO MAIN SURFACE

Position return surface on flat brackets and align return edge to main surface edge. Secure using wood screws.



[Scan to
Watch Step](#)

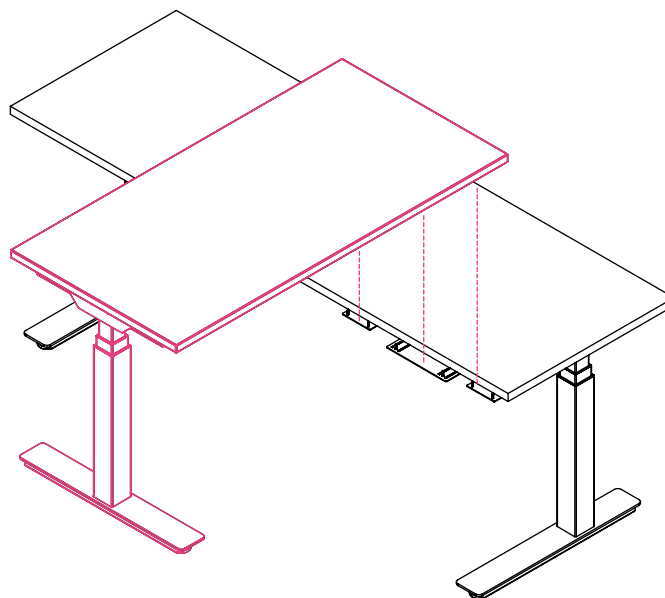


7 | INSTALL SUPPORT BARS

Install support bar under main surface and return with wood screws.



Scan to
Watch Step

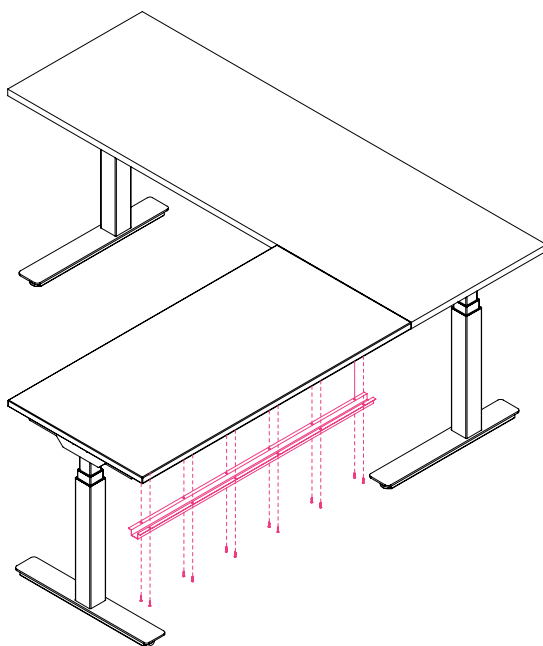


8 | INSTALL RETURN CONTROL BOX

Remove existing control box from main surface and replace with return control box. Secure with existing screws. Connect all three leg cables, handset, and power cable.



Scan to
Watch Step

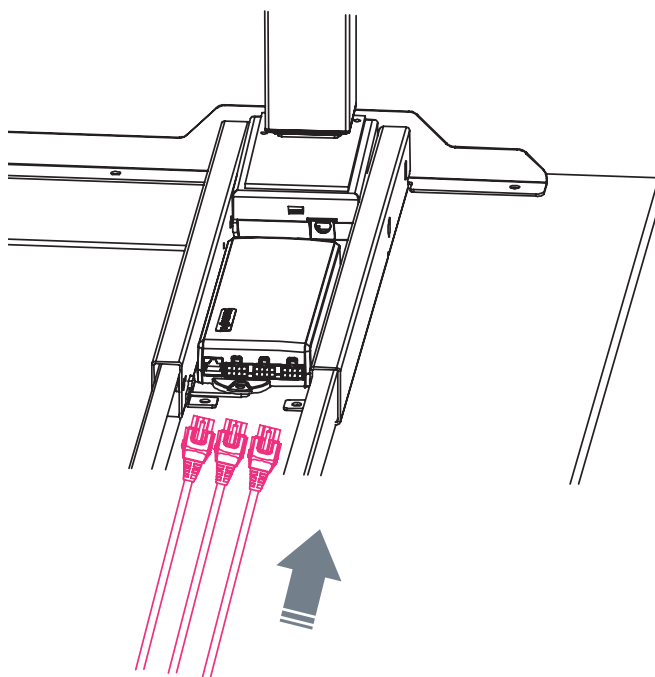

9 | POWER UP AND INITIALIZE HANDSET

Connect power cord. Press and hold **▲** and **▼** simultaneously for 5 seconds until both leg columns are in lowest position (Desk will slightly rise, lower again, and then beep). Release buttons. The system is now operational.



Scan to
Watch Step

